



fire curtains

Despite **Doorfix Ring-gard** Fire Curtains continual raising of the performance bar with their 240 minute integrity fire curtain, it is recognised that not all buildings require this level of protection.

Therefore **Doorfix Ring-gard** introduced the FC60; a 60-minute integrity solution built with all the same build quality and options as the FC240.

In line with **Doorfix Ring-gard** Fire Curtains considerable investment in global testing the FC series was put through its paces with various testing facilities.

The result was a fully certified 60-minute integrity curtain retaining all the advantages of the **Doorfix Ring-gard** system; excellent build quality, simple design, backward compatibility and many control and interface options.

- EN 1634-1 FR & Integrity 60 mins
- BS 476 Part 22 FR & Integrity 60 mins
- BS 7346-3 FR Integrity 60 mins & Propagation
- UL 10D Fire Protective Curtains 60 mins
- UL 10D S Smoke Sealing
- UL864 Releasing Devices



Doorfix Ring-gard Fire Curtains are the only company to have achieved a UL Listing for products of this class.

- Fabric type X32K
- Fabric rating 60 minutes
- Fabric weight 540gr/sq.metre
- Curtain descent Gravity fail-safe


Doorfix Ring-gard Fire Curtains also have a large number of assessments on their tests based around customers' specific requirements for individual projects.

Maintenance

All our products are manufactured to a very high specification. However, planned maintenance can ensure trouble free operation.

Our Service Department can advise on a suitable maintenance agreement.

fire curtains

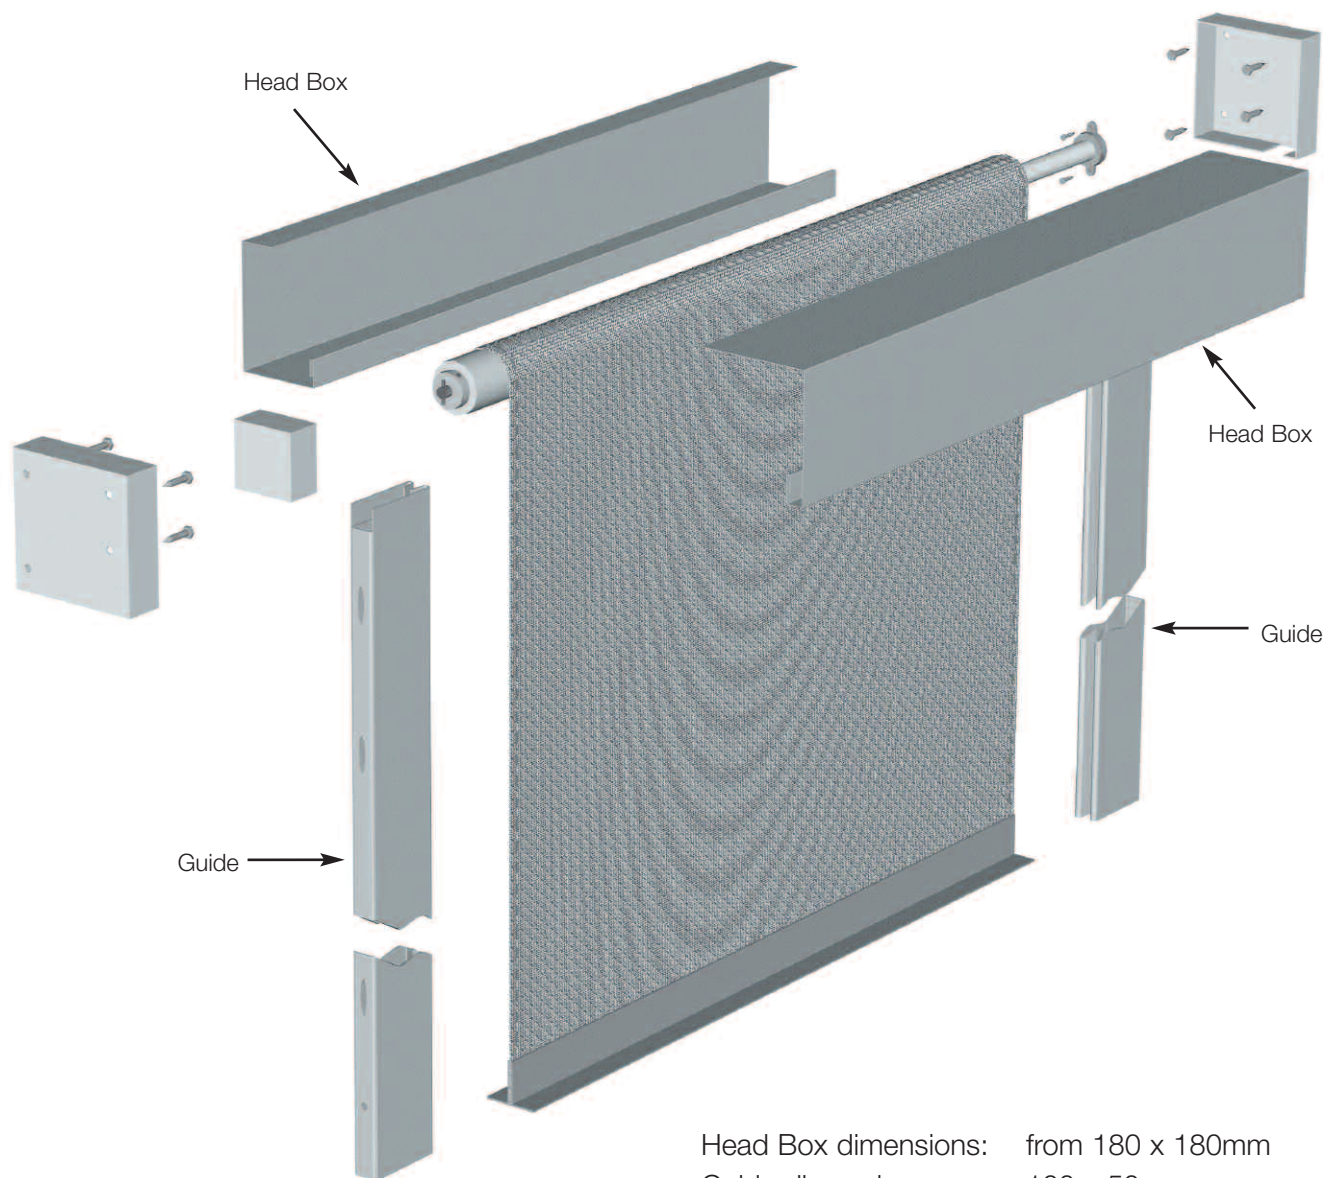

Head Box dimensions: from 180 x 180mm
Guide dimensions: 100 x 50mm

For any other size requirements,
please contact our
technical department.



E: sales@doorfix.ie
www.doorfix.ie
www.doorfix.co.uk

